ÃЂЏЕ‘ <Ļ‚‚ ÃТ‘‘ІТ‘‘Ļ

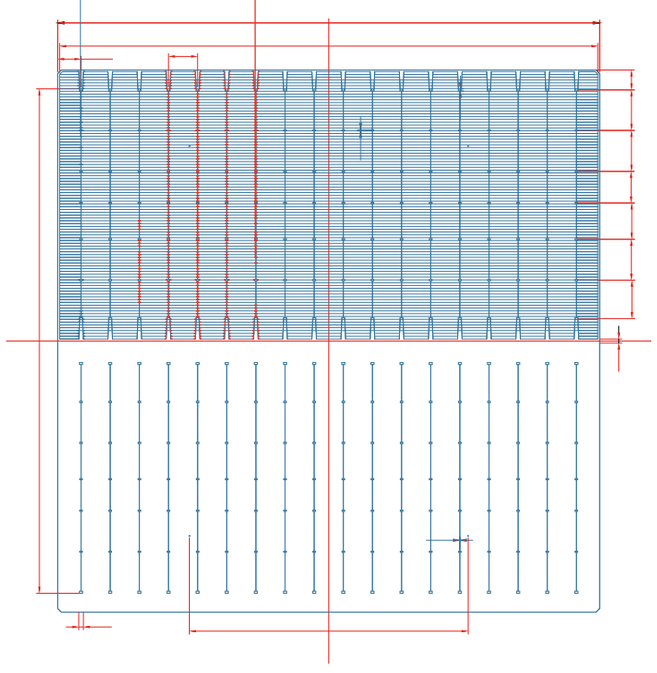

Front Electrode Pattern

Back Electrode Pattern

	aTĻ Ź	ÃŊĻІŝ§ІЁTŝЂŻ	ÊЂЏĻ‘ЁŻІĻ	Ï ŻŝT
Front	Front Finger quantity	210		Line
	Front busbar width			mm
	Distance between busbars			mm
Back	Back finger quantity	228		Line
	Back busbar width			mm
	Distance between back busbars			mm

Standard Test Condition

Electrical properties in STC standard

STC Standard

a Intensity	W m	
b Spectrum	CTL	A
c Temperature		C

Temperature Coefficient

a TkVoltage	C
b TkCurrent	C
c TkPower	C

IV Curve

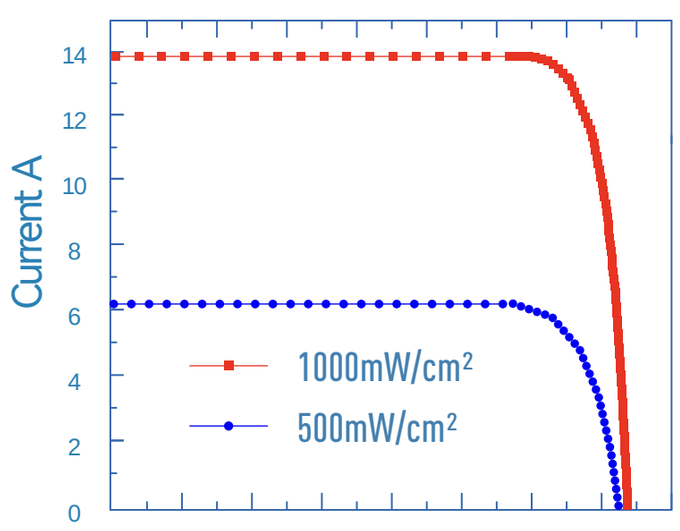
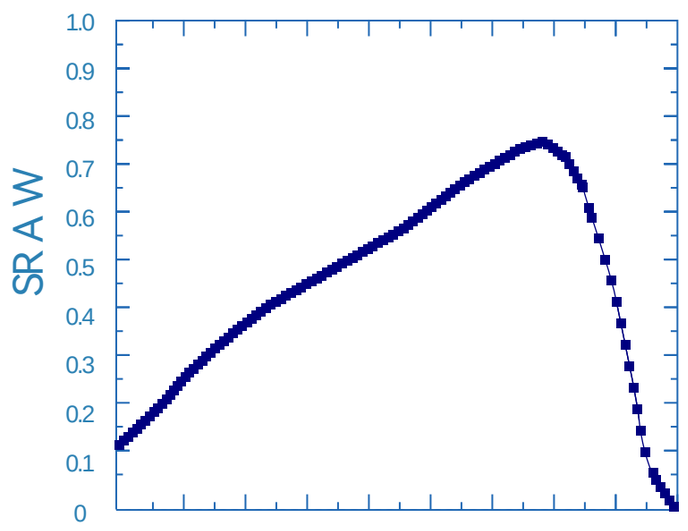
Spectrual Response SR